

## ELASTIC-CRYSTAL GELS

### RELATED APPLICATIONS

This application is a continuation-in-part of the following applications: U.S. Serial No.: 08/819,675 filed March 17, 1997; U.S. Serial No.: 08/719,817 filed September 30, 1996, U.S. Serial No.: 08/665,343 filed June 17, 1996 which is a Continuation-in-part of U.S. Serial No.: 612,586 filed March 8, 1996 which is a Continuation-in-part of Serial Nos: ~~705,096~~ <sup>now US 5,346,466</sup> filed 5/23/91; ~~152,735~~ <sup>now 5,346,466</sup> filed 11/15/93; ~~152,734~~ <sup>now 5,346,466</sup> filed 11/15/93; PCT/US94/04278 filed 4/19/94 (published 5/26/95 No. WO95/13851); PCT/US94/07314 filed 6/27/94 (published 1/4/96 No. WO 96/00118); 288,690 filed 8/11/94; ~~581,188~~ <sup>now 5,346,466</sup> filed 12/29/95; ~~581,191~~ <sup>now 5,346,466</sup> filed 12/29/95; 581,125 filed 12/29/95. In turn U.S. Serial Nos. 581,188; 581,191; and 581,125 are continuation-in-parts of the following applications: Serial Nos.: 288,690, filed August 11, 1994, PCT/US94/07314 filed June 27, 1994 (CIP of PCT/US 94/04278, filed 19 April 1994 which in turn is a CIP of ~~957,290~~ <sup>now US 5,346,466</sup>); Serial No. 152,734, filed November 15, 1993 (CIPs of 114,688; 935,540; 876,118; 705,096; 957,290; 705,711); ~~Serial No. 152,735, filed November 15, 1993 (CIPs of 114,688; 705,711 and 211,426); Serial No. 114,688, filed August 30, 1993 (CIP of 934,027); Serial No. 935,540 filed August 24, 1992 (CIP of 705,711); Serial No. 876,118 filed April 29, 1992; Serial No. 705,096 filed May 23, 1991. In turn, 705,096 is CIP of 705,711 (issued as patent No. 5,262,468 on 11/16/93). Both 876,118 and 705,096 are CIPs of 527,085 filed May 21, 1990. In turn, 527,085 and 705,711 are CIPs of Serial No. 211,426 filed June 24, 1988 which is a CIP of Serial No. 921,752 filed October 21, 1986 which is a CIP of Serial No. 572,172, filed 18 January 1984 and issued as patent No. 4,618,213 on 21 October 1986. The above patents and applications are specifically incorporated herein by reference.~~

### FIELD OF THE INVENTION

The present invention is directed to novel block copolymer gels.

### BACKGROUND OF THE INVENTION

The EB copolymer midblock of conventional SEBS is almost totally amorphous and the EP midblock of SEPS is amorphous and non-crystalline.

Gels made from such block copolymers are rubbery and exhibit substantially no hysteresis. Their rubbery-ness and lack of hysteresis are due to the amorphous nature of their midblocks. Such gels are hereafter referred to as "non-crystalline gels" or more simply as "amorphous gels".

In general, the overall physical properties of amorphous gels are better at higher gel rigidities. The amorphous gels, however, can fail catastrophically when cut or notched while under applied forces of high dynamic and static deformations, such as extreme compression, torsion, high tension, high elongation, and the like. Additionally, the development of cracks or crazes resulting from a large number of deformation cycles can induce catastrophic fatigue failure of amorphous gel composites, such as

tears and rips between the surfaces of the amorphous gel and substrates or at the interfaces of interlocking material(s) and gel. Consequently, such amorphous gels are inadequate for the most demanding applications involving endurance at high stress and strain levels over an extended period of time.

#### SUMMARY OF THE INVENTION

I have now discovered gels with novel properties which comprises: (I) 100 parts by weight of one or more high viscosity linear, branched, star-shaped (radial), or multiarm block copolymers or mixtures of two or more such block copolymers, said block copolymers having one or more midblocks, said midblocks comprising one or more substantially crystalline polyethylene midblocks and with nil, one or more amorphous midblocks; optionally in combination with a selected amount of one or more of a (II) polymer or copolymer, and selected amounts of a plasticizing oil (III) sufficient to achieve gel rigidities of from less than about 2 gram Bloom to about 1,800 gram Bloom with the proviso that said block copolymers having nil amorphous midblocks are combined with at least one block copolymer having at least one amorphous midblock.

As used herein, the term "gel rigidity" in gram Bloom is determined by the gram weight required to depress a gel a distance of 4 mm with a piston having a cross-sectional area of 1 square centimeter at 23°C.

The gels comprising thermoplastic elastomer block copolymers having one or more substantially crystalline polyethylene midblocks of the invention are hereafter referred to as "elastic-crystalline gels" or simpler "crystal gels". The block midblocks of copolymers forming the crystal gels of the invention are characterized by sufficient crystallinity as to exhibit

a melting endotherm of at least about 40°C as determined by DSC curve.

The various types of high viscosity block copolymers employed in forming the crystal gels of the invention are of the general configurations A-Z-A and (A-Z)<sub>n</sub>, wherein the subscript n is two or more. In the case of multiarm block copolymers where n is 2, the block copolymer denoted by (A-Z)<sub>n</sub> is A-Z-A. It is understood that the coupling agent is ignored for sake of simplicity in the description of the (A-Z)<sub>n</sub> block copolymers.

The end block segment (A) comprises a glassy amorphous polymer end block segment which can be polystyrene, poly(alpha-methylstyrene), poly(o-methylstyrene), poly(m-methylstyrene), poly(p-methylstyrene) and the like, preferably, polystyrene. The midblocks (Z) comprises one or more midblocks of substantially crystalline poly(ethylene) (simply denoted by "-E- or (E)") with or without one or more amorphous midblocks of poly(butylene), poly(ethylene-butylene), poly(ethylene-propylene) or combination thereof (the amorphous midblocks are denoted by "-B- or (B)", "-EB- or (EB)", and "-EP- or (EP)" respectively or simply denoted by "-W- or (W)" when referring to one or more of the amorphous midblocks as a group) The A and Z portions are incompatible and form a two or more-phase system consisting of sub-micron amorphous glassy domains (A) interconnected by (Z) chains. The glassy domains serve to crosslink and reinforce the structure. This

physical elastomeric network structure is reversible, and heating the polymer above the softening point of the glassy domains temporarily disrupt the structure, which can be restored by lowering the temperature.

The (I) linear block copolymers are characterized as having a Brookfield Viscosity value at 5 weight percent solids solution in toluene at 30°C of from less than about 40 cps to about 60 cps and higher, advantageously from about 40 cps to about 160 cps and higher, more advantageously from about 50 cps to about 180 cps and higher, still more advantageously from about 70 cps to about 210 cps and higher, and even more advantageously from about 90 cps to about 380 cps and higher.

The (I) branched, star-shaped (radial), or multiarm block copolymers are characterized as having a Brookfield Viscosity value at 5 weight percent solids solution in toluene at 30°C of from about 80 cps to about 380 cps and higher, advantageously from about 150 cps to about 260 cps and higher, more advantageously from about 200 cps to about 580 cps and higher, and still more advantageously from about 100 cps to about 800 cps and higher.

The crystal gels can be made in combination with a selected amount of one or more selected polymers and copolymers (II) including thermoplastic crystalline polyurethane elastomers with hydrocarbon blocks, homopolymers, copolymers, block copolymers, polyethylene copolymers, polypropylene copolymers, and the like described below.

The crystal gels of the invention are also suitable in physically interlocking or forming with other selected materials to form composites combinations. The materials are selected from the group consisting of paper, foam, plastic, fabric, metal, metal foil, concrete, wood, glass, various natural and synthetic fibers, including glass fibers, ceramics, synthetic resin, and refractory materials.

The various aspects and advantages will become apparent to those skilled in the art upon consideration of the accompanying disclosure.

#### DESCRIPTION OF THE DRAWINGS

FIG. 1. Representative components materials of composites forming useful articles of the invention.

Fig. 2. Representative sectional view of composite articles of the invention (Fig. 2a. = MGM, Fig. 2b. = GMG, Fig. 2c. = MGMGMGM, Fig. 2d. = foam entirely interlocked with composition).

Fig. 3a-3n. Representative sectional view of ~~composite articles~~.

Fig. 4a-4w. Representative sectional view of ~~composite articles~~.

Fig. 5. Representation of ~~S-E-EB-S~~ crystalline/polystyrene domain/amorphous structure.

Fig. 6. Representation of S-EB<sub>45</sub>-EP-S polystyrene domain/amorphous

structure.

Fig. 7. Representation of S-E-EB<sub>25</sub>-S crystalline/polystyrene domain/amorphous structure.

Fig. 8. Representation of S-E-EP-E-S crystalline/polystyrene domain/amorphous structure.

Fig. 9. Representation of S-EP-E-S crystalline/polystyrene domain/amorphous structure.

Fig. 10. Representation of S-EP-E-EP-S crystalline/polystyrene domain/amorphous structure.

Fig. 11. Effect of butylene concentration of the percent (%) crystallinity of (CH<sub>2</sub>)<sub>16</sub> units in the elastomer (midblock) phase. Reference W.P. Gergen paper at Rubber Division ACS 1985 and Legge, Norman R., paper at ACS 1987.

#### DESCRIPTION OF THE INVENTION

Thermoplastic elastomer SEBS gels are described in my earlier applications and patents: U.S. Serial Nos: 581,188 filed 12/29/95; 581,191 filed 12/29/95; 581,125 filed 12/29/95; PCT/US94/04278 filed 4/19/94; PCT/US94/07314 filed 6/27/94; 288,690 filed 8/11/94; 152,734, filed 11/15/93; 152,735, 11/15/93; 114,688, filed 8/30/93; 935,540 filed 8/24/92; 876,118 filed 4/29/92; 705,096 filed 5/23/91; 527,058 filed 5/21/90; 921,752 filed 10/21/86; 458,703, filed 1/17/83; 916,731, filed 6/19/78; 815,315, filed 7/13/77; 778,343, filed 3/17/77; U.S. Patent Nos. 5,262,468; 5,153,254; 4,618,213; and 4,369,284. Various patents on thermoplastic elastomers are described in U.S. Patent Nos. 3,595,942, Reissue 27,145-28,236; 3,772,234; 4,116,917; and 4,687,815. Other non-patent publications related to S-EB-S polymers include: W. P. Gergen, "Uniqueness of Hydrogenated Block Copolymers for Elastomeric Applications," presented at the German Rubber Meeting, Wiesbaden, 1983; Kautsch, Gummi, Kunstst. 37, 284 (1984). W.P. Gergen, et al., "Hydrogenated Block Copolymers," Paper No. 57, presented at a meeting of the Rubber Division ACS, Los Angeles, April 25, 1985. Encyclopedia of Polymer Science and Engineering, Vol. 2, pp 324-434, "Block Copolymers". L. Zotteri and et al., "Effect of hydrogenation on the elastic properties of poly(styrene-b-diene-b-styrene) copolymers", Polymer, 1978, Vol. 19, April. J. Kenneth Craver, et al., Applied Polymer Science, Ch. 29, "Chemistry and Technology of Block Polymers", pp. 394-429, 1975. Y. Mahajer and et al., "The influence of Molecular Geometry on the Mechanical Properties of homopolymers and Block Polymers of Hydrogenated Butadiene and Isoprene" reported under U.S. ARO Grant No. DAAG29-78-G-0201. J. E. McGrath, et al., "Linear and Star Branched Butadiene-Isoprene Block Copolymers and Their Hydrogenated Derivatives", Chem. Dept, Virginia Polytechnic Institute and State University Blacksburg, VA, reported work



44-38861-104-10000

ethylene/butylene midsegment was chosen for the S-EB-S block copolymers.

Clair's paper teaches that the EB midblock of conventional S-EB-S polymers is a random copolymer of ethylene and 1-butene exhibiting nearly no crystallinity in the midblock. In the preparation of ethylene-butylene (EB) copolymers, the relative proportions of ethylene and butylene in the EB copolymer chain can be controlled over a broad range from almost all ethylene to almost all butylene. When the EB copolymer is nearly all ethylene, the methylene sequences will crystallize exhibiting properties similar to low density polyethylene. In differential scanning calorimeter (DSC) curves, the melting endotherm is seen on heating and a sharp crystallization exotherm is seen on cooling. As the amount of butylene in the EB copolymer is increased, the methylene sequences are interrupted by the ethyl side chains which shorten the methylene sequences length so as to reduce the amount of crystallinity in the EB copolymer. In conventional S-EB-S polymers, the amount of 1-butene is controlled at a high enough level to make the EB copolymer midblock almost totally amorphous so as to make the copolymer rubbery and soluble in hydrocarbon solvents. Clair suggests that an S-EB-S polymer retaining at least some crystallinity in the EB copolymer midblock may be desirable. Therefore, a new family of S-EB-S polymers are developed (U.S. Patent No. 3,772,234) in which the midblock contains a higher percentage of ethylene. The molecular weights of the new crystalline midblock segment S-EB-S polymers can vary from low molecular weight, intermediate molecular, to high molecular weight; these are designated Shell GR-3, GR-1, and GR-2 respectively. Unexpectedly, the highest molecular weight polymer, GR-2 exhibits an anomalously low softening point. A broad melting endotherm is seen in the DSC curves of these polymers. The maximum in this broad endotherm occurs at about 40°C.

Block copolymers with polyethylene midblocks alone do not form suitable gels for purpose of the invention. Crystalline midblock regions needs to be balanced with amorphous midblock regions in order to obtain soft, flexible and elastic gels with the desired crystalline properties that are not found in totally amorphous gels.

The various representative crystalline/glassy domain/amorphous structures of S-E-EB-S, S-EB<sub>45</sub>-EP-S, S-E-EB<sub>25</sub>-S, S-E-EP-E-S, S-EP-E-S and S-EP-E-EP-S are illustrate in Figures 5-10 above. Although the structure are spheroid representation, cylinders and plates are also within the scope of the present invention. Cylinder and plate structure are obtained with increasing glassy A end blocks. From about 15-30% by weight of A blocks, the block copolymer structure is spheroid. From about 33 about 40% by weight of A blocks, the block copolymer structure becomes cylindrical; and above about 45% A blocks, the structure becomes less cylindrical and more plate like.

In order to obtain elastic crystal gels of the invention, it is necessary that the selective synthesis of butadiene produce sufficient amounts of 1,4 poly(butadiene) that on hydrogenation can exhibit "crystallinity" in the midblocks. In order for the block copolymers forming the crystal gels of the invention to exhibit crystallinity, the crystalline

08863794-052797

midblock segments must contain long runs of  $-\text{CH}_2-$  groups. There should be approximately at least 16 units of  $-(\text{CH}_2)-$  in sequence for crystallinity. Only the  $(-\text{CH}_2-)_4$  units can crystallize, and then only if there are at least 4 units of  $(-\text{CH}_2-)_4$  in sequence; alternatively, the polyethylene units are denoted by  $[-(\text{CH}_2-\text{CH}_2-\text{CH}_2-\text{CH}_2)-]_4$ ,  $[(-\text{CH}_2-)_4]_4$  or  $(-\text{CH}_2-)^{16}$ . The amount of  $(-\text{CH}_2-)^{16}$  units forming the (E) midblocks of the block copolymers comprising the crystal gels of the invention should be at least about 20% which amount is capable of exhibiting a melting endotherm in differential scanning calorimeter (DSC) curves.

Advantageously, the elastomer midblock segment should have a crystallinity of at least about 20% of  $(-\text{CH}_2-)^{16}$  units of the total mole % forming the midblocks of the block copolymer, more advantageously at least about 25%, still more advantageously at least about 30%, especially advantageously at least about 40% and especially more advantageously at least about 50% and higher. Broadly, the crystallinity of the midblocks should range from at least about 20% to about 60%, less broadly from at least about 18% to about 65%, and still less broadly from at least 22% to about 70%.

The melting endotherm in DSC curves of the crystalline block copolymers comprising at least 20% crystallinity are much higher than conventional amorphous block copolymers. The maximum in the endotherm curves of the crystalline block copolymers occurs at about 40°C, but can range from greater than about 25°C to about 60°C and higher. The crystalline block copolymers forming the crystal gels of the invention can exhibit melting endotherms (as shown by DSC) of about 25°C to about 75°C and higher. More specific melting endotherm values of the crystalline midblock block copolymers include: about 28°C, 29°C, 30°C, 31°C, 32°C, 33°C, 34°C, 35°C, 36°C, 37°C, 38°C, 39°C, 40°C, 41°C, 42°C, 43°C, 44°C, 45°C, 46°C, 47°C, 48°C, 49°C, 50°C, 51°C, 52°C, 53°C, 54°C, 55°C, 56°C, 57°C, 58°C, 59°C, 60°C, 61°C, 62°C, 63°C, 64°C, 65°C, 66°C, 67°C, 68°C, 69°C, 70°C, 71°C, 72°C, 73°C, 74°C, 75°C, 76°C, 77°C, 78°C, 79°C, 80°C, 90°C, 100°C, 110°C, 120°C, and higher, whereas, the melting endotherm (DSC) for conventional amorphous midblock segment block copolymers are about 10°C and lower.

The melting endotherm is seen on heating and a sharp crystallization exotherm is seen on cooling. Such midblock crystallization endothermic and exothermic characteristics are missing from DSC curves of amorphous gels. The crystallization exotherm and fusion endotherm of the crystalline block copolymer gels of the invention are determined by ASTM D 3417 method.

Generally, the method of obtaining long runs of crystalline  $-(\text{CH}_2)-$  is by sequential block copolymer synthesis followed by hydrogenation. The attainment of crystal gels of the instant invention is solely due to the selective polymerization of the butadiene monomer (forming the midblocks) resulting in one or more predetermined amount of 1,4 poly(butadiene) blocks followed by sequential polymerization of additional midblocks and hydrogenation to produce one or more crystalline midblocks of the final block copolymers.

The crystalline block copolymers are made by sequential block

8117

08863794-052797

copolymer synthesis, the percentage of crystallinity or  $(-\text{CH}_2-)^{16}$  units should be at least about  $(0.67)^4$  or about 20% and actual crystallinity of about 12%. For example, a selectively synthesized S-EB<sub>n</sub>-S copolymer having a ratio of 33:67 of 1,2 and 1,4 poly(butadiene) on hydrogenation will result in a midblock with a crystallinity of  $(0.67)^4$  or 20%. For sake of simplicity, when n is a subscript of -EB-, n denotes the percentage of  $(-\text{CH}_2-)_4$  units, eg, n = 33 or 20% crystallinity which is the percentage of  $(0.67)^4$  or " $(-\text{CH}_2-)^{16}$ " units. Thus, when n = 28 or 72% of  $(-\text{CH}_2-)_4$  units, the % crystallinity is  $(0.72)^4$  or 26.87% crystallinity attributed to  $(-\text{CH}_2-)^{16}$  units, denoted by -EB<sub>28</sub>-. As a matter of convention, and for purposes of this specification involving hydrogenated polybutadiene: the notation -E- denotes at least about 85% of  $(-\text{CH}_2-)_4$  units. The notation -B- denotes at least about 70% of  $[-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-]$  units. The notation -EB- denotes between about 15 and 70%  $[-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-]$  units. The notation -EB<sub>n</sub>- denotes n%  $[-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-]$  units. For hydrogenated polyisoprene: The notation -EP- denotes about at least 90%  $[-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{CH}_2-]$  units.

Generally, one or more (E) midblocks can be incorporated at various positions along the midblocks of the block copolymers. Using the sequential process for block copolymer synthesis, The (E) midblocks can be positioned as follows:

- i) A-E-W-A
- ii) A-E-W-E-A
- iii) A-W-E-W-A
- iv) A-E-W-E-W-E-W-E-A
- v) A-W-E-W-A-E-A-E-W-E-A
- v) and etc.

The lower flexibility of block copolymer crystal gels due to (E) midblocks can be balanced by the addition of sequentially (W) midblocks. For example, the sequentially synthesized block copolymer S-E-EB-S can maintain a high degree of flexibility due to the presence of amorphous -EB- block. The sequential block copolymer S-E-EB-B-S can maintain a high degree of flexibility due to the presence of amorphous -EB- and -B- midblocks. The sequential block copolymer S-E-EP-E-S can maintain a high degree of flexibility due to the presence of -EP- midblock. The sequential block copolymer S-E-B-S can maintain a high degree of flexibility due to the presence of the -B- midblock. For S-E-S, where the midblock is substantially crystalline and flexibility low, physical blending with amorphous block copolymers such as S-EB-S, S-B-S, S-EP-S, S-EB-EP-S, (S-EP)<sub>n</sub> and the like can produce more softer, less rigid, and more flexible crystal gel.

Because of the (E) midblocks, the crystal gels of the invention exhibit different physical characteristics and improvements over substantially amorphous gels including damage tolerance, improved crack propagation resistance, improved tear resistance producing knotty tears as



08863794-052797

opposed to smooth tears, crystalline melting point of at least 28°C, improved resistance to fatigue, higher hysteresis, etc. Moreover, the crystal gels when stretched exhibit additional yielding as shown by necking caused by stress induced crystallinity. Additionally, the crystallization rates of the crystalline midblocks can be controlled and slowed depending on thermal history producing time delay recovery upon deformation.

Regarding resistance to fatigue, fatigue (as used herein) is the decay of mechanical properties after repeated application of stress and strain. Fatigue tests give information about the ability of a material to resist the development of cracks or crazes resulting from a large number of deformation cycles. Fatigue test can be conducted by subjecting samples of amorphous and crystal gels to deformation cycles to failure (appearance of cracks, crazes, rips or tears in the gels).

Tensile strength can be determined by extending a selected gel sample to break as measured at 180° U bend around a 5.0 mm mandrel attached to a spring scale. Likewise, tear strength of a notched sample can be determined by propagating a tear as measured at 180° U bend around a 5.0 mm diameter mandrel attached to a spring scale.

Various block copolymers can be obtained which are amorphous, highly rubbery, and exhibiting minimum dynamic hysteresis:

#### Block copolymer S-EB-S

The monomer butadiene can be polymerized in a ether/hydrocarbon solvent to give a 50/50 ratio of 1,2 poly(butadiene)/1,4 poly(butadiene) and on hydrogenation no long runs of  $-CH_2-$  groups and negligible crystallinity, ie, about  $(0.5)^4$  or 0.06 or 6% and actual crystallinity of about 3%. Due to the constraints of  $T_g$  and minimum hysteresis, conventional S-EB-S have ethylene-butylene ratios of about 60:40 with a crystallinity of about  $(0.6)^4$  or 0.129 or 12% and actual crystallinity of about 7.7%.

#### Block copolymer S-EP-S

The monomer isoprene when polymerized will produce 95% 1,4 poly(isoprene)/5% 3,4 poly(isoprene) and upon hydrogenation will form amorphous, rubbery poly(ethylene-propylene) midblock and no long runs of  $-CH_2-$  and no crystallinity.

#### Mixed block copolymer S-EB/EP-S

The polymerization of a 50/50 mixture of isoprene/butadiene monomers in suitable ether/hydrocarbon solvents to give equal amounts of 1,2 and 1,4 poly(butadiene) on hydrogenation will produce a maximum crystallinity of  $(0.25)^4$  or 0.4%. The actual crystallinity would be approximately about 0.2%, which is negligible and results in a good rubbery midblock.


The polymerization of a 80/20 mixture of isoprene/butadiene monomers in suitable ether/hydrocarbon solvents to give equal amounts of 1,2 and 1,4 poly(butadiene) will upon hydrogenation produce a low crystallinity of  $(0.10)^4$  or 0.01%. The actual crystallinity would be approximately about 0.006%, which is negligible and results in a good rubbery midblock.

The polymerization of a 20/80 mixture of isoprene/butadiene monomers in suitable ether/hydrocarbon solvents to give equal amounts of 1,2 and 1,4 poly(butadiene) will upon hydrogenation produce a low crystallinity of  $(0.4)^4$  or 2.56%. The actual crystallinity would be approximately about 1.53%, which is negligible and results in a good rubbery midblock.

The polymerization of a 20/80 mixture of isoprene/butadiene monomers in suitable ether/hydrocarbon solvents to give a 40:60 ratio of 1,2 and 1,4 poly(butadiene) will upon hydrogenation produce a low crystallinity of  $(0.48)^4$  or 5.3%. The actual crystallinity would be approximately about 3.2%, which is negligible and results in a good rubbery midblock.

For purpose of convince and simplicity, the hydrogenated polybutadiene are denoted as follows: -E- denotes at least 85% R-1 units, -B- denotes at least 70% R-2 units, -EB- denotes between 15 and 70% R-2 units, -EB<sub>n</sub>- denotes n% R-2 units, and -EP- denotes 90% R-3 units.

Table I below gives the % of units on hydrogenation of polybutadiene/polyisoprene copolymer midblocks

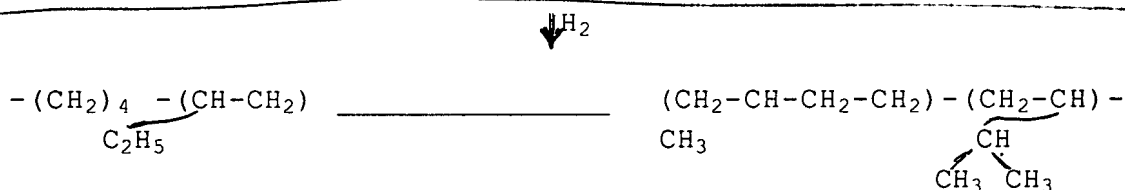

n% from polybutadiene

(1-n)% from polyisoprene

90%·n

10%·n

95%·(1-n)

5%·(1-n)

where n is the mole % polybutadiene in the polybutadiene-polyisoprene starting polymer

n =	R-1	R-2	R-3	R-4
0%	0%	0%	95%	5%
20%	18%	2%	76%	4%
40%	36%	4%	57%	3%
60%	54%	6%	38%	2%
80%	72%	8%	19%	1%
100%	90%	10%	0%	0%

where R-1 denotes  $(\text{-CH}_2\text{-})_4$ ,

R-2 denotes  $-(\text{CH}-\text{CH}_2)-$ ,  
 $\quad \quad \quad |$   
 $\quad \quad \quad \text{C}_2\text{H}_5$

R-3 denotes  $-(\text{CH}_2-\underset{\text{CH}_3}{\underset{|}{\text{CH}}}-\text{CH}_2-\text{CH}_2)-$ , and

R-4 denotes  $-(\text{CH}_2-\text{CH})-$   
 $\begin{array}{c} | \\ \text{CH} \\ / \quad \backslash \\ \text{CH}_3 \quad \text{CH}_3 \end{array}$

Therefore, the percentage that can crystallize is  $[(-CH_2-)_4]^4$  since this is the chance of getting four  $(-CH_2-)_4$  units in sequence. The percentage that will crystallize is about 60% of this.

n =	$(-\text{CH}_2-)_4$	$[(-\text{CH}_2-)_4]^4$	$0.6 \times [(-\text{CH}_2-)_4]^n$
0%	0%	0%	0%
20%	18%	0.1%	0.06%
40%	36%	1.7%	1.0%
60%	54%	8.5%	5.1%
80%	72%	26.9%	16.1%
100%	90%	65.6%	39.4%

This applies to polymerization in a hydrocarbon solvent. In an ether (eg, diethylether), the percentage  $(-\text{CH}_2-)_4$  units will be reduced so that crystallinity will be negligible. *negligible* (2)

n =	$(-\text{CH}_2-)_4$	$[(\text{-CH}_2\text{-})_4]^4$	$0.6 \times [(\text{-CH}_2\text{-})_4]^n$
0%	0%	0%	0%
20%	5%	0.0006%	0.0004%
40%	10%	0.01%	0.006%
60%	15%	0.05%	0.03%
80%	20%	0.16%	0.10%
100%	25%	0.39%	0.23%

These values are all negligible. There will be no ~~detectable~~ <sup>detectable</sup> crystallinity in any of these polymer midblocks. In a mixed ether/hydrocarbon solvent, values will be intermediate, depending on the

ratio of ether to hydrocarbon.

The midblocks (Z) of one or more -E-, -B-, -EB-, or -EP- can comprise various combinations of midblocks between the selected end blocks (A); these include:

-E-EB-, -E-EP-, -B-EP-, -B-EB-, -E-EP-E-, -E-EB-B-, -B-EP-B-, -B-EB-B-, -E-B-EB-, -E-B-EP-, -EB-EP-, -E-EB-EP-, -E-EP-EB-, -B-EB-EP-, -B-EP-EB-, -E-EP-E-EP-, -E-EP-E-EB-, -B-EP-B-EP-, -B-EB-B-EB-, -B-EB-B-EP-, -E-EB-B-EP-, -E-EP-B-EB-, -E-EP-E-EP-E-, -B-EP-B-EP-B-, -E-EP-E-EB-, -E-EP-E-EP-EB-, -E-EP-E-EP-E-, -E-EP-EB-EP-EB-B- and the like.

The block copolymers of (A-Z-A) can be obtained by sequential synthesis methods followed by hydrogenation of the midblocks. As denoted above, abbreviations are interchangeably used, for example, (S-E-EP-S) denotes poly(styrene-ethylene-ethylene-co-propylene-styrene). Other linear block copolymers (denoted in abbreviations) include the following:

(S-E-EB-S), (S-E-EP-S), (S-B-EP-S), (S-B-EB-S), (S-E-EP-E-S), (S-E-EB-B-S), (S-B-EP-B-S), (S-B-EB-B-S), (S-E-B-EB-S), (S-E-B-EP-S), (S-EB-EP-S), (S-E-EB-EP-S), (S-E-EP-EB-S), (S-B-EB-EP-S), (S-B-EP-EB-S), (S-E-EP-E-EP-S), (S-E-EP-E-EB-S), (S-EP-B-EP-S), (S-B-EB-B-EB-S), (S-B-EB-B-EP-S), (S-E-EB-B-EP-S), (S-E-EP-B-EB-S), (S-E-EP-E-EP-E-S), (S-B-EP-B-EP-B-S), (S-E-EP-E-EB-S), (S-E-EP-E-EP-EB-S), (S-E-EP-E-EP-E-S), (S-E-EP-EB-EP-EB-B-S), (S-E-EP-EB-EP-EB.....-S) and the like.

The multiblock star-shaped (or radial) copolymers (A-Z)<sub>n</sub>X can be obtained by sequential synthesis methods including hydrogenation of selected block copolymers made by polymerizing half of the block copolymers such as SBS or SIS and couple the halves with a coupling agent such as an organic dihalide; or couple with an agent such as SnCl<sub>4</sub>, which results in star-shaped block copolymers (four branches). Coupling with divinyl benzene give block copolymers which are very highly branched. Radial block copolymers suitable for use in forming the crystal gels of the present invention include: (S-E-EB-S)<sub>n</sub>, (S-E-EP)<sub>n</sub>, (S-B-EP)<sub>n</sub>, (S-B-EB)<sub>n</sub>, (S-E-EP-E)<sub>n</sub>, (S-E-EB-B)<sub>n</sub>, (S-B-EP-B)<sub>n</sub>, (S-B-EB-B)<sub>n</sub>, (S-E-B-EB)<sub>n</sub>, (S-E-B-EP)<sub>n</sub>, (S-EB-EP)<sub>n</sub>, (S-E-EB-EP)<sub>n</sub>, (S-E-EP-EB)<sub>n</sub>, (S-B-EB-EP)<sub>n</sub>, (S-B-EP-EB)<sub>n</sub>, (S-E-EP-E-EP)<sub>n</sub>, (S-E-EP-E-EB)<sub>n</sub>, (S-EP-B-EP)<sub>n</sub>, (S-B-EB-B-EB)<sub>n</sub>, (S-B-EB-B-EP)<sub>n</sub>, (S-E-EB-B-EP)<sub>n</sub>, (S-E-EP-B-EB)<sub>n</sub>, (S-E-EP-E-EP-E)<sub>n</sub>, (S-B-EP-B-EP-B)<sub>n</sub>, (S-E-EP-E-EB)<sub>n</sub>, (S-E-EP-E-EP-EB)<sub>n</sub>, (S-E-EP-E-EP-E)<sub>n</sub>, (S-E-EP-EB-EP-EB-B)<sub>n</sub>

The selected amount of crystallinity in the midblock should be sufficient to achieve improvements in one or more physical properties including improved damage tolerance, improved crack propagation resistance, improved tear resistance, improved resistance to fatigue of the bulk gel and resistance to catastrophic fatigue failure of crystal gel composites, such as between the surfaces of the crystal gel and substrate or at the interfaces of the interlocking material(s) and crystal gel, which improvements are not found in amorphous gels at corresponding gel rigidities.

As an example, when fabric interlocked or saturated with amorphous S-EB-S gels (gel composites) are used as gel liners for lower limb or above the knee prosthesis to reduce pain over pressure areas and give relief to

the amputee, the commonly used amorphous gels forming the liners can tear or rip apart during marathon racewalk after 50-70 miles. In extended use, the amorphous gels can rip on the bottom of the liner in normal racewalk training of 40-60 miles over a six weeks period. In such demanding applications, the crystal gels are especially advantageous and is found to have greater tear resistance and resistance to fatigue resulting from a large number of deformation cycles than amorphous gels.

Selected (I) linear block and radial copolymers utilized in forming the crystal gels of the invention are characterized as having an ethylene to butylene midblock ratio (E:B) of about 85:15 to about 65:35. Advantageously, the butylene concentration of the midblock is about 35% or less, more advantageously, about 30% or less, still more advantageously, about 25% or less, especially advantageously, about 20% or less. Advantageously, the ethylene to butylene midblock ratios can range from about 89:11, 88:12, 87:13, 86:14, 85:15, 84:16, 83:17, 82:18, 81:19, 80:20, 79:21, 78:22, 77:23, 76:24, 75:25, 74:26, 73:27, 72:28, 71:29, 70:30, 69:31, 68:32, 67:33, 66:34 to about 65:35.

The A to Z midblock ratio of the block copolymers suitable for forming crystal gels of the invention can range from about 20:80 to 40:60 and higher. More specifically, the values can be 15:85, 19:81, 20:80, 21:79, 22:78, 23:77, 24:76, 25:75, 26:74, 27:73, 28:72, 29:71, 30:70, 31:69, 32:68, 33:67, 34:66, 35:65, 36:64, 37:63, 38:62, 39:61, 40:60, 41:59, 42:58, 43:57, 44:65, 45:55, 46:54, 47:53, 48:52, 49:51, 50:50, 51:49 and 52:48.

The crystal gels can optionally comprise selected major or minor amounts of one or more polymers or copolymers (II) provided the amounts and combinations are selected without substantially decreasing the desired properties. The polymers and copolymers can be linear, star-shaped (radial), branched, or multiarm; these including: (SBS) styrene-butadiene-styrene block copolymers, (SIS) styrene-isoprene-styrene block copolymers, low and medium viscosity (S-EB-S) styrene-ethylene-butylene-styrene block copolymers, (S-EP) styrene-ethylene-propylene block copolymers, (S-EP-S) styrene-ethylene/propylene-styrene block copolymers, (S-E-EPS) styrene-ethylene-ethylene/propylene-styrene block copolymers, (SB)<sub>n</sub> styrene-butadiene and (S-EB)<sub>n</sub>, (S-EB-S)<sub>n</sub>, (S-E-EP)<sub>n</sub>, (SEP)<sub>n</sub>, (SI)<sub>n</sub> multi-arm, branched or star-shaped copolymers, polyethyleneoxide (EO), poly(dimethylphenylene oxide), teflon (TFE, PTFE, PEA, FEP, etc), optical clear amorphous copolymers based on 2,2-bis(trifluoromethyl)-4,5-difluoro-1,3-dioxole (PDD) and tetrafluoroethylene (TFE), maleated S-EB-S block copolymer, polycarbonate, ethylene vinyl alcohol copolymer, and the like. Still, other (II) polymers include homopolymers which can be utilized in minor amounts; these include: polystyrene, polydimethylsiloxane, polyolefins such as polybutylene, polyethylene, polyethylene copolymers, polypropylene, and the like. Polyurethane elastomers based on saturated hydrocarbon diols (Handlin, D., Chin. S., and Masse. M., et al. "POLYURETHANE ELASTOMERS BASED ON NEW SATURATED HYDROCARBON DIOLS" Published Society of Plastics Industry, Polyurethane Division, Las Vegas,

October 23, 1996) are also suitable for use in blending with the block copolymers (I) used in forming the crystal gels of the invention. Such saturated hydrocarbon diols include hydroxyl terminated oligomers of poly(ethylene-butylene) (EB), poly(ethylene-propylene) (EP), -E-EB-, -E-EP-, -B-EP-, -B-EB-, -E-EP-E-, -E-EB-B-, -B-EP-B-, -B-EB-B-, -E-B-EB-, -E-B-EP-, -EB-EP-, -E-EB-EP-, -E-EP-EB-, -B-EB-EP-, -B-EP-EB-, -E-EP-E-EP-, -E-EP-E-EB-, -B-EP-B-EP-, -B-EB-B-EB-, -B-EB-B-EP-, -E-EB-B-EP-, -E-EP-B-EB-, -E-EP-E-EP-E-, -B-EP-B-EP-B-, -E-EP-E-EB-, -E-EP-E-EP-EB-, -E-EP-E-EP-E-, -E-EP-EB-EP-EB-B- and the like. As an example, thermoplastic polyurethane made with isocyanates and chain extenders such as TMPD and BEPD from saturated hydrocarbon diol KLP L-2203 having a hard segment contents of 22% exhibits clean phase separation of the hard and soft segments with <sup>a</sup> glass ~~a~~ transition of -50°C. KLP L-2203 based TPU's can be mixed with the crystalline block copolymers to form soft crystal gels within the gel rigidity ranges of the invention.

Suitable polyolefins include polyethylene and polyethylene copolymers such as Dow Chemical Company's Dowlex 3010, 2021D, 2038, 2042A, 2049, 2049A, 2071, 2077, 2244A, 2267A; Dow Affinity ethylene alpha-olefin resin PL-1840, SE-1400, SM-1300; more suitably: Dow Elite 5100, 5110, 5200, 5400, Primacor 141--XT, 1430, 1420, 1320, 3330, 3150, 2912, 3340, 3460; Dow Attane (ultra low density ethylene-octene-1 copolymers) 4803, 4801, 4602,

The conventional term "major" means about 51 weight percent and higher (e.g. 55%, 60%, 65%, 70%, 75%, 80% and the like) and the term "minor" means 49 weight percent and lower (e.g. 2%, 5%, 10%, 15%, 20%, 25% and the like).

Example of (II) polymers, copolymers, and blends include: (a) Kraton G 1651, G 1654X; (b) Kraton G 4600; (c) Kraton G 4609; other suitable high viscosity polymer and oils include: (d) Tuftec H 1051; (e) Tuftec H 1041; (f) Tuftec H 1052; (g) Kuraray ~~SEPS~~ <sup>S-E-EP-S</sup> 4033; (h) Kuraray S-EB-S 8006; (i) Kuraray SEPS 2005; (j) Kuraray SEPS 2006, and (k) blends (polyblends) of (a)-(h) with other polymers and copolymers include: (1) S-EB-S/SBS; (2) S-EB-S/SIS; (3) S-EB-S/(SEP); (4) S-EB-S/(SEB)<sub>n</sub>; (5) S-EB-S/(SEB)<sub>n</sub>; (6) S-EB-S/(SEP)<sub>n</sub>; (7) S-EB-S/(SI)<sub>n</sub>; (8) S-EB-S/(SI) multiarm; (9) S-EB-S/(SEB)<sub>n</sub>; (10) (SEB)<sub>n</sub> star-shaped copolymer; (11) s made from blends of (a)-(k) with other homopolymers include: (12) S-EB-S/polystyrene; (13) S-EB-S/polybutylene; (14) S-EB-S/poly-ethylene; (14) S-EB-S/polypropylene; (16) SEP/S-EB-S, (17) SEP/SEPS, (18) SEP/SEPS/SEB, (19), SEPS/S-EB-S/SEP, (20), SEB/S-EB-S (21), EB-EP/S-EB-S (22), S-EB-S/EB (23), S-EB-S/EP (24), (25) (SEB)<sub>n</sub> s, (26) (SEP)<sub>n</sub>, (27) Kuraray 2007 (SEPS), (28) Kuraray 2002, (SEPS), (29) Kuraray 4055 (~~S-EB-EP-S~~) <sup>S-E-EP-S</sup> (30) Kuraray 4077 (~~S-EB-EP-S~~) <sup>S-E-EP-S</sup> (31) Kuraray 4045 (~~S-EB-EP-S~~) <sup>S-E-EP-S</sup> (32) (S-EB-EP)<sub>n</sub>, (33) (SEB)<sub>n</sub>, (34) EPDM, (35) EPR, (36) EVA, (37) coPP, (38) EMA, (39) EEA, (40) DuPont Teflon AF amorphous fluoropolymers, (41) Dow polydimethylsiloxane, (42) maleated S-EB-S (maleation level 2-30%), (43) (EP)<sub>n</sub> and the like.

Representative examples of commercial elastomers that can be combined with the block copolymers (I) described above include: Shell Kratons D1101, D1102, D1107, D1111, D1112, D1113X, D1114X, D1116, D1117, D1118X, D1122X,

W  
a)  
C  
D1125X, D1133X, D1135X, D1184, D1188X, D1300X, D1320X, D4122, D4141, D4158, D4240, G1650, G1652, G1657, G1701X, G1702X, G1726X, G1750X, G1765X, FG1901X, FG1921X, D2103, D2109, D2122X, D3202, D3204, D3226, D5298, D5999X, D7340, G1650, G1651, G1652, G4609, G4600, G1654X, G2701, G2703, G2705, G1706, G2721X, G7155, G7430, G7450, G7523X, G7528X, G7680, G7705, G7702X, G7720, G7722X, G7820, G7821X, G7827, G7890X, G7940, FG1901X and FG1921X. Kuraray's SEP, SEPS, S-EB-S, S-EB-EP-S Nos. 1001, 1050, 2027, 2003, 2006, 2007, 2008, 2023, 2043, 2063, 2050, 2103, 2104, 2105, 4033, 4045, 4055, 4077, 8004, 8006, 8007, H-VS-3 (S-V-EP)N, and the like.

E  
The ~~amorphous~~ S-EB-S and (S-EB)n (II) copolymers can have a broad range of styrene to ethylene-butylene ratios (S:EB) of about 20:80 or less to about 40:60 or higher. The S:EB weight ratios can range from lower than about 20:80 to above about 40:60 and higher. More specifically, the values can be 15:85, 19:81, 20:80, 21:79, 22:78, 23:77, 24:76, 25:75, 26:74, 27:73, 28:72, 29:71, 30:70, 31:69, 32:68, 33:67, 34:66, 35:65, 36:64, 37:63, 38:62, 39:61, 40:60, 41:59, 42:58, 43:57, 44:65, 45:55, 46:54, 47:53, 48:52, 49:51, 50:50, 51:49, 52:48 and etc. Other ratio values of less than 19:81 or higher than 51:49 are also possible. Broadly, the styrene block to elastomeric block ratio of the high viscosity ~~linear~~ <sup>linear</sup> and star copolymers is about 20:80 to about 40:60 or higher, less broadly about 31:69 to about 40:60, preferably about 32:68 to about 38:62, more preferably about 32:68 to about 36:64, particularly more preferably about 32:68 to about 34:66, especially more preferably about 33:67 to about 36:64, and still more preferably about 30:70.

08863794-082797  
The Brookfield Viscosity of a 5 weight percent solids solution in toluene at 30°C of 2006, 4045, 4055, 4077 typically range about 20-35, about 25-150, about 60-150, about 200-400 respectively. Typical Brookfield Viscosities of a 10 weight percent solids solution in toluene at 30°C of 1001, 1050, 2007, 2063, 2043, 4033, 2005, 2006, are about 70, 70, 17, 29, 32, 50, 1200, and 1220 respectively. Typical Brookfield Viscosity of a 25 weight percent solids solution in toluene at 25°C of Kraton D1101, D1116, D1184, D1300X, G1701X, G1702X are about 4000, 9000, 20000, 6000, 50000 and 50000 cps respectively. Typical Brookfield Viscosity of a 10 weight percent solids solution in toluene at 25°C of G1654X is about 370 cps. The Brookfield Viscosities of a 20 and 30 weight percent solids solution in toluene at 30°C of H-VS-3 are about 133 cps and 350 cps respectively.

Suitable block copolymers (II) and their typical viscosities are further described. Shell Technical Bulletin SC:1393-92 gives solution viscosity as measured with a Brookfield model RVT viscometer at 25°C for Kraton G 1654X at 10% weight in toluene of approximately 400 cps and at 15% weight in toluene of approximately 5,600 cps. Shell publication SC:68-79 gives solution viscosity at 25°C for Kraton G 1651 at 20 weight percent in toluene of approximately 2,000 cps. When measured at 5 weight percent solution in toluene at 30°C, the solution viscosity of Kraton G 1651 is about 40. Examples of high viscosity S-EB-S triblock copolymers includes Kuraray's S-EB-S 8006 which exhibits a solution viscosity at 5 weight percent at 30°C of about 51 cps. Kuraray's 2006 SEPS polymer exhibits a

viscosity at 20 weight percent solution in toluene at 30°C of about 78,000 cps, at 5 weight percent of about 27 cps, at 10 weight percent of about 1220 cps, and at 20 weight percent 78,000 cps. Kuraray SEPS 2005 polymer exhibits a viscosity at 5 weight percent solution in toluene at 30°C of about 28 cps, at 10 weight percent of about 1200 cps, and at 20 weight percent 76,000 cps. Other grades of S-EB-S, SEPS, (SEB)<sub>n</sub>, (SEP)<sub>n</sub> polymers can also be utilized in the present invention provided such polymers exhibits the required high viscosity. Such S-EB-S polymers include (high viscosity) Kraton G 1855X which has a Specific Gravity of 0.92, Brookfield Viscosity of a 25 weight percent solids solution in toluene at 25°C of about 40,000 cps or about 8,000 to about 20,000 cps at a 20 weight percent solids solution in toluene at 25°C.

The styrene to ethylene and butylene (S:EB) weight ratios for the Shell designated polymers can have a low range of 20:80 or less. Although the typical ratio values for Kraton G 1651, 4600, and 4609 are approximately about 33:67 and for Kraton G 1855X approximately about 27:73, Kraton G 1654X (a lower molecular weight version of Kraton G 1651 with somewhat lower physical properties such as lower solution and melt viscosity) is approximately about 31:69, these ratios can vary broadly from the typical product specification values. In the case of Kuraray's S-EB-S polymer 8006 the S:EB weight ratio is about 35:65. In the case of Kuraray's 2005 (SEPS), and 2006 (SEPS), the S:EP weight ratios are 20:80 and 35:65 respectively. The styrene to ethylene-ethylene/propylene (S:EP-EP) ratios of Kuraray's SEPTON 4045, 4055, and 4077 are typically about 37.6, 30, 30 respectively. More typically the (S:EP-EP) and (S:EP) ratios can vary broadly much like S:EB ratios of S-EB-S and (SEB)<sub>n</sub> from less than 19:81 to higher than 51:49 (as recited above) are possible. It should be noted that multiblock copolymers including SEPTON 4045, 4055, 4077 and the like are described in my cited copending parent applications and are the subject matter of related inventions.

The block copolymers (II) such as Kraton G 1654X having ratios of 31:69 or higher can be used and do exhibit about the same physical properties in many respects to Kraton G 1651 while Kraton G 1654X with ratios below 31:69 may also be use, but they are less advantageous due to their decrease in the desirable properties of the final gel.

Plasticizers (III) particularly advantageous for use in practicing the present invention are will known in the art, they include rubber processing oils such as paraffinic and naphthenic petroleum oils, highly refined aromatic-free paraffinic and naphthenic food and technical grade white petroleum mineral oils, and synthetic liquid oligomers of polybutene, polypropene, polyterpene, etc. The synthetic series process oils are high viscosity oligomers which are permanently fluid liquid nonolefins, isoparaffins or paraffins of moderate to high molecular weight.

Examples of representative commercially available plasticizing oils include Amoco® polybutenes, hydrogenated polybutenes, polybutenes with epoxide functionality at one end of the polybutene polymer, liquid poly(ethylene/butylene), liquid hetero-telechelic polymers of

17



08863794-052797

poly(ethylene/butylene/styrene) with epoxidized polyisoprene and poly(ethylene/butylene) with epoxidized polyisoprene: Example of such polybutenes include: L-14 (320 Mn), L-50 (420 Mn), L-100 (460 Mn), H-15 (560 Mn), H-25 (610 Mn), H-35 (660 Mn), H-50 (750 Mn), H-100 (920 Mn), H-300 (1290 Mn), L-14E (27-37 cst @ 100oF Viscosity), H-300E (635-690 cst @ 210oF Viscosity), Actipol E6 (365 Mn), E16 (973 Mn), E23 (1433 Mn), Kraton L-2203 and Kraton L-1203, EKP-206, EKP-207, HPVM-2203 and the like. Example of various commercially oils include: ARCO Prime (55, 70, 90, 200, 350, 400 and the like), Duraprime and Tufflo oils (6006, 6016, 6016M, 6026, 6036, 6056, 6206, etc) , other white mineral oils include: Bayol, Bernol, American, Blandol, Drakeol, Ervol, Gloria, Kaydol, Litetek, Lyondell (Duraprime 55, 70, 90, 200, 350, 400, etc), Marcol, Parol, Peneteck, Primol, Protol, Sontex, Witco brand white oils including RR-654-P and the like. Generally, plasticizing oils with average molecular weights less than about 200 and greater than about 700 may also be used (e.g., H-300 (1290 Mn)).

Comparisons of oil extended S-EB-S triblock copolymers have been described in Shell Chemical Company Technical Bulletin SC:1102-89 (April 1989) "KRATON® THERMOPLASTIC RUBBERS IN OIL GELS" which is incorporated herein by reference.

The crystal gels can be made non-adhearing, non-sticking, (non-tacky), by incorporating an advantage amount of stearic acid (octadecanoic acid), metal stearates (e.g., calcium stearate, magnesium stearate, zinc stearate, etc.), polyethylene glycol distearate, polypropylene glycol ester or fatty acid, and polytetramethylene oxide glycol disterate, waxes, stearic acid and waxes, metal stearate and waxes, metal stearate and stearic acid. The use of stearic acid alone do not reduce tack. The amount of stearic acid is also important. As an example, ratio of 200 grams stearic acid to 2,000 gram of S-EB-S (a ratio of 0.1) will result in spotted tack reduction on the surface of the gel. A ratio of 250 to 2,000 will result in spotted crystallized stearic acid regions on the surface of the gel or spotted tack reduction. A ratio of 300 to 2,000 will result in complete tack reduction with large stearic acid crystallized regions on the surface of the gel. When microcrystalline waxes are incorporated together with stearic acid, the crystallization of stearic acid completely disappears from the surface of the gel. For example excellent result is achieved with 200 grams of stearic acid, 150 grams of microcrystalline wax and 2,000 grams of S-EB-S. The same excellent result is achieved when S-EB-S is adjusted to 3,000 grams, 4,000 grams, etc. The same result is achieved with (I) copolymers as well as in combination with polymers (II) such as SEPS, S-EB-EP-S, (S-EB-EP)<sub>n</sub>, (SEB)<sub>n</sub>, (SEP)<sub>n</sub> polymers.

The crystal gels can also contain useful amounts of conventionally employed additives such as stabilizers, antioxidants, antiblocking agents, colorants, fragrances, flame retardants, flavors, other polymers in minor amounts and the like to an extend not affecting or substantially decreasing the desired properties. Additives useful in the crystal gel of the present invention include: tetrakis[methylene 3, -(3'5'-di-tertbutyl-4"-

hydroxyphenyl) propionate] methane, octadecyl 3-(3",5"-di-tert-butyl-4"-hydroxyphenyl) propionate, distearyl-pentaerythritol-dipropionate, thiodiethylene bis-(3,5-ter-butyl-4-hydroxy) hydrocinnamate, (1,3,5-trimethyl-2,4,6-tris[3,5-di-tert-butyl-4-hydroxybenzyl] benzene), 4,4"-methylenebis(2,6-di-tert-butylphenol), ~~stearic~~ <sup>stearic</sup> acid, oleic acid, stearamide, behenamide, oleamide, erucamide, N,N"-ethylenebisstearamide, N,N"-ethylenebisoleamide, stereryl erucamide, erucyl erucamide, oleyl palmitamide, stearyl stearamide, erucyl stearamide, calcium stearate, other metal sterates, waxes (e.g., polyethylene, polypropylene, microcrystalline, carnauba, paraffin, montan, candelilla, beeswax, ozokerite, ceresine, and the like), teflon (TFE, PTFE, PEA, FEP, etc), polysiloxane, etc. The crystal gel can also contain metallic pigments (aluminum and brass flakes), TiO<sub>2</sub>, mica, fluorescent dyes and pigments, phosphorescent pigments, aluminatetrihydrate, antimony oxide, iron oxides (Fe<sub>3</sub>O<sub>4</sub>, -Fe<sub>2</sub>O<sub>3</sub>, etc.), iron cobalt oxides, chromium dioxide, iron, barium ferrite, strontium ferrite and other magnetic particle materials, molybdenum, silicones, silicone fluids, lake pigments, aluminates, ceramic pigments, ironblues, ultramarines, phthalocynines, azo pigments, carbon blacks, silicon dioxide, silica, clay, feldspar, glass microspheres, barium ferrite, wollastonite and the like. The report of the committee on Magnetic Materials, Publication NMAB-426, National Academy Press (1985) is incorporated herein by reference.

The crystal gels can also be made into composites. The crystal gels can be casted unto various substrates, such as open cell materials, metals, ceramics, glasses, and plastics, elastomers, fluoropolymers, expanded fluoropolymers, Teflon (TFE, PTFE, PEA, FEP, etc), expanded Teflon, spongy expanded nylon, etc.; the molten crystal gel is deformed as it is being cooled. Useful open-cell plastics include: polyamides, polyimides, polyesters, polyisocyanurates, polyisocyanates, polyurethanes, poly(vinyl alcohol), etc. Suitable open-celled Plastic (sponges) are described in "Expanded Plastics and Related Products", Chemical Technology Review No. 221, Noyes Data Corp., 1983, and " Applied Polymer Science", Organic Coatings and Plastic Chemistry, 1975. These publications are incorporated herein by reference.

The crystal gels denoted as "G" can be physically interlocked with a selected material denoted as "M" to form composites as denoted for simplicity by their combinations  $G_n G_n$ ,  $G_n G_n G_n$ ,  $G_n M_n$ ,  $G_n M_n G_n$ ,  $M_n G_n M_n$ ,  $M_n G_n G_n$ ,  $G_n G_n M_n$ ,  $M_n M_n M_n G_n$ ,  $M_n M_n M_n G_n M_n$ ,  $M_n G_n G_n M_n$ ,  $G_n M_n G_n G_n$ ,  $G_n M_n M_n G_n$ ,  $G_n M_n M_n G_n$ ,  $G_n G_n M_n M_n$ ,  $G_n G_n M_n G_n M_n$ ,  $G_n M_n G_n G_n$ ,  $G_n G_n M_n$ ,  $G_n M_n G_n M_n M_n$ ,  $M_n G_n M_n G_n M_n G_n$ ,  $G_n G_n M_n M_n G_n$ ,  $G_n G_n M_n G_n M_n G_n$ , and the like or any of their permutations of one or more  $G_n$  with  $M_n$  and the like, wherein when n is a subscript of M, n is the same or different selected from the group consisting of paper, foam, plastic, fabric, metal, concrete, wood, glass, ceramics, synthetic resin, synthetic fibers or refractory materials and the like; wherein when n is a subscript of G, n denotes the same or a different gel rigidity of from about 2 gram to about 1,800 gram Bloom). The crystal gels of the composites are formed from copolymers (I), polymers (II), and plasticizers (III) described above.

08863794 052797

Sandwiches of crystal gel-material (i.e., crystal gel-material-crystal gel or material-crystal gel-material, etc.) are useful as dental floss, shock absorbers, acoustical isolators, vibration dampers, vibration isolators, and wrappers. For example the vibration isolators can be use under research microscopes, office equipment, tables, and the like to remove background vibrations. The tear resistance nature of the instant crystal gels are superior in performance to amorphous block copolymer gels which are much less resistance to crack propagation caused by long term continue dynamic loadings.

The crystal gels are prepared by blending together the components including other additives as desired at about 23°C to about 100°C forming a paste like mixture and further heating said mixture uniformly to about 150°C to about 200°C until a homogeneous molten blend is obtained. Lower and higher temperatures can also be utilized depending on the viscosity of the oils and amounts of multiblock copolymers (I) and polymer (II) used. These components blend easily in the melt and a heated vessel equipped with a stirrer is all that is required. Small batches can be easily blended in a test tube using a glass stirring rod for mixing. While conventional large vessels with pressure and/or vacuum means can be utilized in forming large batches of the instant crystal gels in amounts of about 40 lbs or less to 10,000 lbs or more. For example, in a large vessel, inert gases can be employed for removing the composition from a closed vessel at the end of mixing and a partial vacuum can be applied to remove any entrapped bubbles. Stirring rates utilized for large batches can range from about less than 10 rpm to about 40 rpm or higher.

The crystal gel articles can be formed by blending, injection molding, extruding, spinning, casting, dipping and other conventional methods. For example, Shapes having various cross-section can be extruded. The crystal gels can also be formed directly into articles or remelted in any suitable hot melt applicator and extruded into shaped articles and films or spun into threads, strips, bands, yarns, or other shapes. With respect to various shapes and yarn, its size are conventionally measured in denier (grams/9000 meter), tex (grams/1000 meter), and gage (1/2.54 cm). Gage, tex, denier can be converted as follows:  $\text{tex} = \text{denier}/9 = \text{specific gravity} (2135/\text{gage})$ , for rectangular cross section,  $\text{tex} = \text{specific gravity} (5806 \times 103)(th)(w)/9$ , where  $th$  is the thickness and  $w$  the width of the strip, both in centimeters. General descriptions of (1) block copolymers, (2) elastomeric fibers and conventional (3) gels are found in volume 2, starting at pp. 324-415, volume 6, pp 733-755, and volume 7, pp. 515 of ENCYCLOPEDIA OF POLYMER SCIENCE AND ENGINEERING, 1987 which volumes are incorporated herein by reference.

The crystal gels are excellent for cast molding and the molded products have various excellent characteristics which cannot be anticipated form the properties of the raw components. Other conventional methods of forming the composition can be utilized.

Not only do the crystal gels have all the desirable combination of physical and mechanical properties substantially similar to high viscosity

20

amorphous S-EB-S gels such as high elongation at break of at least 1,600%, ultimate tensile strength of about  $8 \times 10^5$  dyne/cm<sup>2</sup> and higher, low elongation set at break of substantially not greater than about 2%, substantially about 100% snap back when extended to 1,200% elongation, and a gel rigidity of substantially from about 2 gram to about 1,800 gram Bloom and higher, the crystal gels of the present invention exhibit improved tear resistance and resistance to fatigue not obtainable from amorphous S-EB-S gels at corresponding gel rigidities.

The crystal gels of the present invention exhibit one or more of the following properties. These are: (1) tensile strength of about  $8 \times 10^5$  dyne/cm<sup>2</sup> to about  $10^7$  dyne/cm<sup>2</sup> and greater; (2) elongation of less than about 1,600% to about 3,000% and higher; (3) elasticity modules of about  $10^4$  dyne/cm<sup>2</sup> to about  $10^6$  dyne/cm<sup>2</sup> and greater; (4) shear modules of about  $10^4$  dyne/cm<sup>2</sup> to about  $10^6$  dyne/cm<sup>2</sup> and greater as measured with a 1, 2, and 3 kilogram load at 23°C; (5) gel rigidity of about less than about 2 gram Bloom to about 1,800 gram Bloom and higher as measured by the gram weight required to depress a gel a distance of 4 mm with a piston having a cross-sectional area of 1 square cm at 23°C; (6) tear propagation resistance greater than the tear resistance of amorphous S-EB-S gels at corresponding gel rigidities; (7) resistance to fatigue greater than the fatigue resistance of amorphous S-EB-S gels at corresponding gel rigidities; (8) and substantially 100% snap back recovery when extended at a crosshead separation speed of 25 cm/minute to 1,200% at 23°C. Properties (1), (2), (3), and (6) above are measured at a crosshead separation speed of 25 cm/minute at 23°C.

The crystal gel articles molded from the instant crystal gels have additional important advantages in that they end-use performance properties are greater than amorphous S-EB-S gels in that they are more resistant to cracking, tearing, crazing or rupture in flexural, tension, compression, or other deforming conditions of use. Like amorphous gels, the molded articles made from the instant composition possess the intrinsic properties of elastic memory enabling the articles to recover and retain its original molded shape after many extreme deformation cycles.

Because of their improved tear resistance and improved resistance to fatigue, the crystal gels of the present invention achieve greater performance than amorphous gels in low frequency vibration applications, such as viscoelastic layers in constrained-layer damping of mechanical structures and goods, as viscoelastic layers used in laminates for isolation of acoustical and mechanical noise, as anti-vibration elastic support for transporting shock sensitive loads, as vibration isolators for an optical table, as viscoelastic layers used in wrappings, enclosures and linings to control sound, as compositions for use in shock and dielectric encapsulation of optical, electrical, and electronic components.

Because of their improved tear resistance and improved resistance to fatigue, the crystal gels are more useful as molded shape articles for use in medical and sport health care, such use include therapeutic hand exercising grips, dental floss, crutch cushions, cervical pillows, bed

2025-04-05 14:00:00

21

08863794-052797

wedge pillows, leg rest, neck cushion, mattress, bed pads, elbow padding, dermal pads, wheelchair cushions, helmet liner, cold and hot packs, exercise weight belts, traction pads and belts, cushions for splints, slings, and braces (for the hand, wrist, finger, forearm, knee, leg, clavicle, shoulder, foot, ankle, neck, back, rib, etc.), and also soles for orthopedic shoes. Other uses include various shaped articles as toys, optical uses (e.g., cladding for cushioning optical fibers from bending stresses) and various optical devices, as lint removers, dental floss, as tips for swabs, as fishing bate, as a high vacuum seal (against atmosphere pressure) which contains a useful amount of a mineral oil-based magnetic fluid particles, etc. Moreover, the casted, extruded, or spun threads, strips, yarns, tapes can be weaved into cloths, fine or coarse fabrics.

The crystal gels can be formed in any shape; the original shape can be deformed into another shape (to contact a regular or irregular surface) by pressure and upon removal of the applied pressure, the composition in the deformed shape will recover back to its original shape.

As an example of the versatility of use of the instant crystal gels, a hand exerciser can be made in any shape so long as it is suitable for use as a hand exerciser: a sphere shape, a cube shape, a rectangular shape, etc. Likewise, a wheelchair cushion can be made from the composition in any shape, so long as it meets the needs of the user of the cushion. For example, a cushion can be made by forming the composition into a selected shape matching the contours of the specific body part or body region. The composition can be formed into any desired shaped, size and thickness suitable as a cushion; the shaped composition can be additionally surrounded with film, fabric, foam, or any other desired material or combinations thereof. Moreover, the composition can be casted onto such materials, provided such materials substantially maintain their integrity (shape, appearance, texture, etc.) during the casting process. The same applies for brace cushions, liners, linings and protective coverings for the hand, wrist, finger, forearm, knee, leg, etc.

Because of their improved tear resistance and resistance to fatigue, the crystal gels exhibit versatility as balloons for medical uses, such as balloon for valvuloplasty of the mitral valve, gastrointestinal balloon dilator, esophageal balloon dilator, dilating balloon catheter use in coronary angiogram and the like. Since the crystal gels are more tear resistant, they are especially useful for making condoms, toy balloons, and surgical and examination gloves. As toy balloons, the crystal gels are safer because it will not rupture or explode when punctured as would latex balloons which often times cause injuries or death to children by choking from pieces of latex rubber. The crystal gels are advantageously useful for making gloves, thin gloves for surgery and examination and thicker gloves for vibration damping which prevents damage to blood capillaries in the fingers and hand caused by handling strong shock and vibrating equipment.

Other uses include self sealing enclosures for splicing electrical and telephone cables and wires. For example, the crystal gels can be pre-formed into a small diameter tubing within an outer elastic tubing, both the



08863794-052797

In all cases, the tear strength of crystal gels are higher than that of amorphous gels. The rigidities of the crystal gels for use as dental floss advantageously should be selected to exhibit a propagating tear force (when propagating a tear as measured at 180° U bend around a 5.0 mm diameter mandrel attached to a spring scale) of at least about 1 Kg/cm, more advantageously at least 2 Kg/cm, and still more advantageously of about 3 Kg/cm and higher. For any gel to be considered useful for flossing, the gels should exhibit tear strengths of at least 2 Kg/cm and higher, advantageously of at least 4 Kg/cm and higher, more advantageously of at least 6 Kg/cm and higher, exceptionally more advantageously of at least 8 Kg/cm and higher. Typically, the tear propagation strength should range from about 5 Kg/cm to about 20 Kg/cm and higher, more typically from about less than 5 Kg/cm to about 25 Kg/cm and higher, especially more typically from about less than 6 Kg/cm to about 30 Kg/cm and higher, and exceptionally more typically from about less than 8 Kg/cm to about 35 Kg/cm and higher.

For any gel to be considered useful for flossing, the gels, critically, should advantageously exhibit a propagating tension tear force (when a cylindrical sample is notched and a tear is initiated at the notched area and propagated past its maximum cylindrical diameter by length-wise stretching of the cylindrical sample) of at least about 1 Kg/cm, more advantageously at least 2 Kg/cm, and still more advantageously of about 4 Kg/cm and higher. Although the crystal gels of the present invention have improved tear resistance and resistance to fatigue greater than the amorphous gels at corresponding gel rigidities, the high and ultra-high tear resistant gels of my other related parent and c-i-p applications typically will exhibit even higher tear resistance values.

While advantageous components and formulation ranges based on the desired properties of the crystal gels have been disclosed herein. Persons of skill in the art can extend these ranges using appropriate material according to the principles discussed herein. All such variations and deviations which rely on the teachings through which the present invention has advanced the art are considered to be within the spirit and scope of the present invention.

The invention is further illustrated by means of the following illustrative embodiments, which are given for purpose of illustration only and are not meant to limit the invention to the particular components and amounts disclosed.

#### EXAMPLE I

Gels of 100 parts of high viscosity linear Kraton G1651 (amorphous S-EB-S), Septon 8006 (amorphous S-EB-S), and a high viscosity radial amorphous midblock segment (SEB)<sub>n</sub> triblock copolymers and 1,600, 1,200, 1,000, 800, 600, 500, 450, 300, 250 parts by weight of Duraprime 200 white oil (plasticizer) are melt blended and samples molded, the bulk gel rigidities are found to be within the range of 2 to 1,800 gram Bloom and the tensile strength, notched tear strength, and resistance to fatigue are

24

found to decrease with increase amounts of plasticizers.

#### EXAMPLE II

Example I is repeated using high viscosity crystalline midblock segment linear S-EB-S and radial (SEB)<sub>n</sub> triblock copolymers with ethylene to butylene midblock ratios (E:B) of 89:11, 88:12, 87:13, 86:14, 85:15, 84:16, 83:17, 82:18, 81:19, 80:20, 79:21, 78:22, 77:23, 76:24, 75:25, 74:26, 73:27, 72:28, 71:29, and 70:30 in combination with an equal amount of amorphous S-EB-S having (E:B) ratio of about 60:40, the bulk gel rigidities are found to be within the range of 2 gram to 1,800 gram Bloom and the notched tear strength and resistance to fatigue of the gel at corresponding rigidities are found to be greater than that of amorphous gels of Example I.

#### EXAMPLE III

Gels of 100 parts of Kraton G1651 (amorphous S-EB-S), Septon 8006 (amorphous S-EB-S), and a high viscosity amorphous midblock segment (SEB)<sub>n</sub> linear and radial triblock copolymers, 1,600, 1,200, 1,000, 800, 600, 500, 450, 300, 250 parts by weight of Duraprime 200 white oil (plasticizer), and 10 parts of Dow polydimethylsiloxane are melt blended and samples molded, the bulk gel rigidities are found to be within the range of 2 to 1,800 gram Bloom and the tensile strength, notched tear strength, and resistance to fatigue are found to decrease with increase amounts of plasticizers.

#### EXAMPLE IV

Gels of 100 parts of Kraton G1651 (amorphous S-EB-S), Septon 8006 (amorphous S-EB-S), and a high viscosity amorphous midblock segment (SEB)<sub>n</sub> linear and radial triblock copolymers, 1,600, 1,200, 1,000, 800, 600, 500, 450, 300, 250 parts by weight of Duraprime 200 white oil (plasticizer), and 2 parts of Dupont Teflon AF 1600 are melt blended and samples molded, the bulk gel rigidities are found to be within the range of 2 to 1,800 gram Bloom and the tensile strength, notched tear strength, and resistance to fatigue are found to decrease with increase amounts of plasticizers.

#### EXAMPLE V

Example III is repeated using high viscosity crystalline midblock segment linear S-EB-S and radial (SEB)<sub>n</sub> triblock copolymers with ethylene to butylene midblock ratios (E:B) of 89:11, 88:12, 87:13, 86:14, 85:15, 84:16, 83:17, 82:18, 81:19, 80:20, 79:21, 78:22, 77:23, 76:24, 75:25, 74:26, 73:27, 72:28, 71:29, and 70:30 in combination with an equal amount of amorphous S-EB-S having (E:B) ratio of about 60:40, the bulk gel rigidities are found to be within the range of 2 gram to 1,800 gram Bloom and the notched tear strength and resistance to fatigue of the gel at corresponding rigidities are found to be greater than that of amorphous gels of Example III.

25



#### EXAMPLE VI

Example IV is repeated using high viscosity crystalline midblock segment linear S-EB-S and radial (SEB)<sub>n</sub> triblock copolymers with ethylene to butylene midblock ratios (E:B) of 89:11, 88:12, 87:13, 86:14, 85:15, 84:16, 83:17, 82:18, 81:19, 80:20, 79:21, 78:22, 77:23, 76:24, 75:25, 74:26, 73:27, 72:28, 71:29, and 70:30 in combination with an equal amount of amorphous S-EB-S having (E:B) ratio of about 60:40, the bulk gel rigidities are found to be within the range of 2 gram to 1,800 gram Bloom and the notched tear strength and resistance to fatigue of the gel at corresponding rigidities are found to be greater than that of amorphous gels of Example IV.

#### EXAMPLE VII

Gels of 100 parts of high viscosity linear (S-EB-S), (S-EP-S), (S-B-EP-S), (S-B-EB-S), (S-B-EP-B-S), (S-B-EB-B-S), (S-B-EB-EP-S), (S-B-EP-EB-S), (S-EB-EP-S), (S-EP-B-EP-S), (S-B-EB-B-EB-S), (S-B-EB-B-EP-S) and (S-B-EP-B-EP-B-S) block copolymers and 1,600, 1,200, 1,000, 800, 600, 500, 450, 300, 250 parts by weight of Duraprime 200 white oil (plasticizer) are each melt blended and samples molded, the bulk gel rigidities are found to be within the range of 2 to 1,800 gram Bloom and the tensile strength, notched tear strength, and resistance to fatigue are found to decrease with increase amounts of plasticizers.

#### EXAMPLE VIII

Gels of 100 parts of high viscosity linear (S-EB<sub>45</sub>-EP-S), (S-E-EB<sub>25</sub>-S), (S-EP-E-EP-S), (S-E-EB-S), (S-E-EP-S), (S-E-EP-E-S), (S-E-EB-B-S), (S-E-B-EB-S), (S-E-B-EP-S), (S-E-EB-EP-S), (S-E-EP-EB-S), (S-E-EP-E-EP-S), (S-E-EP-E-EB-S), (S-E-EB-B-EP-S), (S-E-EP-B-EB-S), (S-E-EP-E-EP-E-S), (S-E-EP-E-EB-S), (S-E-EP-E-EP-EB-S), (S-E-EP-E-EP-E-S), and (S-E-EP-EB-EP-EB-B-S) block copolymers and 1,600, 1,200, 1,000, 800, 600, 500, 450, 300, 250 parts by weight of Duraprime 200 white oil (plasticizer) are each melt blended and samples molded, the bulk gel rigidities are found to be within the range of 2 to 1,800 gram Bloom and the tensile strength, notched tear strength, and resistance to fatigue are found to be greater than that of amorphous gels of Example VII.

#### EXAMPLE IX

Example VIII is repeated and minor amounts of 2, 5, 10 and 15 parts of the following polymers are formulated with each of the triblock copolymers: styrene-butadiene-styrene block copolymers, styrene-isoprene-styrene block copolymers, low viscosity styrene-ethylene-butylene-styrene block copolymers, styrene-ethylene-propylene block copolymers, styrene-ethylene-propylene-styrene block copolymers, styrene-butadiene, styrene-isoprene, polyethyleneoxide, poly(dimethylphenylene oxide), polystyrene, polybutylene, polyethylene, polypropylene, high ethylene content EPDM, amorphous copolymers based on 2,2-bistrifluoromethyl-4,5-difluoro-1,3-dioxole/tetrafluoroethylene. The bulk gel rigidities of each of

the formulations are found to be within the range of 2 gram to 2,000 gram Bloom and the notched tear strength and resistance to fatigue of the gels at corresponding rigidities are found to be greater than that of amorphous gels of Example I formulated with corresponding amounts of the same polymers.

#### EXAMPLE X

Molten gels of Examples I-IX are formed into composites with paper, foam, plastic, elastomers, fabric, metal, concrete, wood, glass, ceramics, synthetic resin, synthetic fibers, and refractory materials and the resistance to fatigue of the composite-crystal gels at corresponding rigidities are found to be greater than that of the composite-amorphous gels.

#### EXAMPLE XI

Three cm thick sheets of each of the crystal gels of Example II and VIII and the amorphous gels of Example I and VII are tested by repeatedly displacing the sheets to a depth of 1 cm using a 10 cm diameter smooth (water soaked) wood plunger for 1,000, 5,000, 10,000, 25,000, 50,000, and 100,000 cycles. The sheets of crystal gels are found capable of exhibiting greater fatigue resistance than the sheets of amorphous gels at corresponding rigidities.

While preferred components and formulation ranges have been disclosed herein persons of skill in the art can extend these ranges using appropriate material according to the principles discussed herein. Furthermore, Crystalline midblock segment block polymers can be use in blending with other engineering plastics and elastomeric polymers to make alloyed compositions having improved impact and tear resistance properties. All such variations and deviations which rely on the teachings through which the present invention has advanced the art are considered to be within the spirit and scope of the present invention.

27

03863794-052797